

TOVO




KINGSTON SURFACE – KS101

| | |
|-----------------|--|
| DESCRIPTION | Surface Mounted Downlight |
| CODES | 4385 |
| FINISHES | White, Black, Copper, Brass, Stainless steel, Aged Copper, Aged Brass, Custom |
| CCOLOUR TEMP | 2700K, 3000K, Tunable White |
| CRI | ≥92 |
| LUMEN OUTPUT | 650Lm |
| WATTAGE | 9.5W |
| BEAM ANGLE | *60°, 38°, 24° |
| FIXTURE VOLTAGE | 24V DC Constant Voltage 25-42V DC Constant Current 240V AC (GU10) |
| DIMMING | Based On Driver and Voltage Selection |
| DRIVER | Remote Driver Required for 24V DC Selection Remote Driver Provided for Constant Current Selection GU10 Lamp Provided for 240V AC Selection |
| DRIVER OPTIONS | Non-Dim, Phase, Touch, DALI |
| IP RATING | IP44 |

Notes:

*60 degree beam angle as standard.

All data stipulated are nominal values based on 2700K with accuracy of +/- 5%.

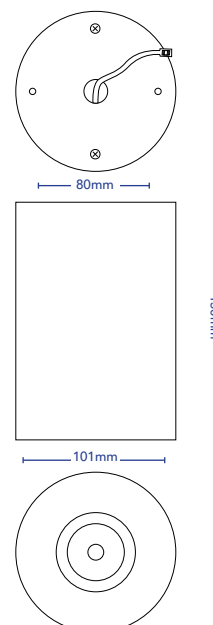

WHITE



BLACK



COPPER



BRASS



STAINLESS STEEL



CUSTOM



AGED COPPER



AGED BRASS



INGRESS
IP44

KINGSTON SURFACE - KS101

MANUFACTURING OPTIONS

| F I X T U R E | | | | | | D R I V E R |
|---------------|----------------------|----------------------|---------------------|-----------------|---|----------------|
| CODE | OUTER FINISH | INNER FINISH | CCT | BEAM ANGLE | VOLTAGE | DIMMING |
| 4385 | WH - White | WH - White | 27 - 2700K | 24 - 24° Narrow | 24V - 24V DC | ND - Non-Dim |
| | BLK - Black | BLK - Black | 30 - 3000K | 38 - 38° Medium | *Remote driver required | PH - Phase Dim |
| | CU - Copper | CU - Copper | | 60 - 60° Wide | | TH - Touch Dim |
| | BR - Brass | BR - Brass | | | | DA - DALI |
| | SS - Stainless Steel | SS - Stainless Steel | | | | |
| | AC - Aged Copper | AC - Aged Copper | | | | |
| | AB - Aged Brass | AB - Aged Brass | CCT | BEAM ANGLE | VOLTAGE | DIMMING |
| | CF - Custom Finish | CF - Custom Finish | 27 - 2700K | 24 - 24° Narrow | CC - 20V-40V DC | PH - Phase Dim |
| | | | 30 - 3000K | 38 - 38° Medium | *Dedicated remote driver provided @ 250mA | TH - Touch Dim |
| | | | | 60 - 60° Wide | | DA - DALI |
| | | | CCT | BEAM ANGLE | VOLTAGE | DIMMING |
| | | | 22/40 - 2200K-4000K | 24 - 24° Narrow | TW - 20V-40V DC | DA - DALI |
| | | | 27/65 - 2700K-6500K | 38 - 38° Medium | *Dedicated remote TW driver provided. @ 250mA. 4 Core cable required. | |
| | | | | 60 - 60° Wide | | |
| | | | CCT | BEAM ANGLE | VOLTAGE | DIMMING |
| | | | 27 - 2700K | 60 - 60° Wide | 240V - 240V AC | ND - Non-Dim |
| | | | 30 - 3000K | | *No driver required | PH - Phase Dim |

Example Code: 4385_WH_CU_27_38_CC_PH

Notes:
60 degree beam angle as standard.
240V AC Fixture are only available with GU10 lamps.
Phase dimable drivers are not recommended for 24V DC fixtures due to possible flickering, but can be provided upon request.
Raw metal outer barrel finishes can only be paired with the same raw metal finish on the inner barrel.